

Operating and installation instructions



Open barbeque grill CS 1312 CS 1322

To avoid the risk of accidents or damage to the appliance it is **essential** to read these instructions before it is installed and used for the first time.

en - GB

M.-Nr. 07 180 420

Contents

Guide to the appliance	4
CS 1312	4
CS 1322	5
Accessories supplied	6
Warning and Safety instructions	7
Caring for the environment	12
Before using for the first time	13
Operation	14
Grill chart	14
To prepare the grill	16
Switching on and off	16
Grilling	17
Useful tips	17
After grilling	17
Safety features	18
Overheating protection	18
Safety switch-out	18
Cleaning and care	19
Problem solving guide	22
Optional accessories	23

Safety instructions for installation 25

Appliance and building-in dimensions 29

CS 1312 29

CS 1322 30

Preparing the worktop 31

Installation of several appliances 32

Fixing the spring clamps and spacer bars 34

Installing the appliance(s) 36


General installation tips 37

Electrical connection 38

After sales service, data plate 40

Guide to the appliance

CS 1312

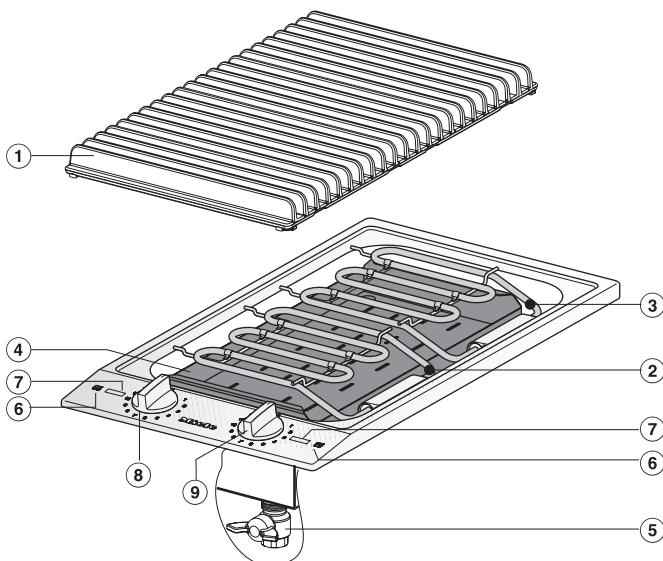

- ① Grill rack
- ② Front heating element
- ③ Rear heating element
- ④ Lava rock container
- ⑤ Drain tap
- ⑥ Symbols to indicate which heating element the control is for
- ⑦ Display

Controls for the heating elements:

- ⑧ Front
- ⑨ Rear


Display



⑩

⑩ In-operation indicator


CS 1322

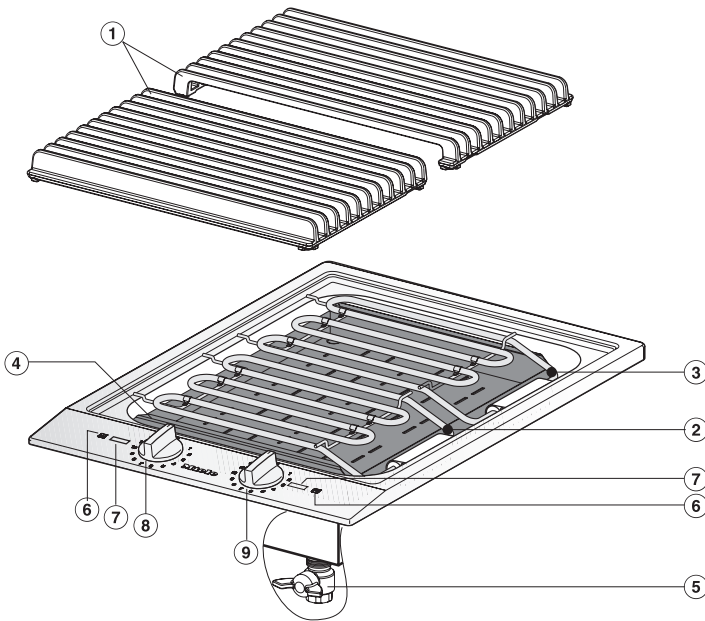

- ① Grill racks
- ② Front heating element
- ③ Rear heating element
- ④ Lava rock container
- ⑤ Drain tap
- ⑥ Symbols to indicate which heating element the control is for
- ⑦ Display

Controls for the heating elements:

- ⑧ Front
- ⑨ Rear



Display

- ⑩ In-operation indicator

Guide to the appliance

Accessories supplied


Additional accessories can be ordered at extra cost. See "Optional accessories" for further details on ordering.

Lava rocks

Tongs



Brush



Warning and Safety instructions

This appliance complies with all current local and national safety requirements. Improper use can, however, present a risk of both personal injury and material damage.

To avoid the risk of accidents and damage to the appliance, please read these instructions carefully before installation and before using it for the first time. They contain important notes on the installation, safety, operation and care of the appliance.

Keep these instructions in a safe place and ensure that new users are familiar with the content. Pass them on to any future owner.

Correct application

► This appliance is intended for domestic use only and may only be used as described in these instructions. Any other usage is at the owner's risk and could be dangerous. The manufacturer cannot be held liable for damage resulting from incorrect or improper use or operation.

► This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised whilst using it or have been shown how to use it correctly by a person responsible for their safety.

Warning and Safety instructions

Safety with children

► This appliance is only intended for use by adults who have read these instructions. It is not a toy! To avoid the risk of injury, keep children well away, and do not let them play with it or use the controls. They will not understand the potential dangers posed by it. They should be supervised whenever you are working in the kitchen.

► Older children may use the appliance only when its operation has been clearly explained to them and they are able to use it safely, recognising the dangers of misuse.

► The appliance gets hot when in use and remains hot for quite a while after being switched off. To safeguard against burning, keep children well away from the appliance at all times.

► Do not store anything which might arouse a child's interest in storage areas above or next to the grill. Otherwise they could be tempted into climbing onto the appliance with the risk of burning themselves.

► Ensure that children cannot reach the drain tap where hot liquid could be drained out.

► Packaging, e.g. cling film, polystyrene and plastic wrappings, must be kept out of the reach of babies and young children. Danger of suffocation. Dispose of or recycle all packaging safely as soon as possible.

Technical safety

► Installation, maintenance and repairs may only be carried out by a suitably qualified and competent person in strict accordance with current national and local safety regulations. Repairs and other work by unqualified persons could be dangerous. The manufacturer cannot be held liable for unauthorised work.

► Before installation, check the appliance for visible signs of damage. Under no circumstances should you use a damaged appliance. A damaged appliance is dangerous.

► The electrical safety of this appliance can only be guaranteed when continuity is complete between it and an effective earthing system. It is most important that this basic safety requirement is present and tested regularly, and where there is any doubt the household wiring system should be inspected by a qualified electrician. The manufacturer cannot be held liable for the consequences of an inadequate earthing system (e.g. electric shock).

► Before connecting the appliance to the mains supply, make sure that the voltage and frequency details given on the data plate correspond with the on-site electricity supply, otherwise the appliance could be damaged. Consult a qualified electrician if in any doubt.

► Do not connect the appliance to the mains electricity supply by an extension lead or a multi-socket unit. These do not guarantee the required safety of the appliance (e.g. danger of overheating).

► For safety reasons, this appliance may only be used when it has been built in.

► This appliance may be connected via a fused plug and switched socket. If you wish to connect it to an fused spur connection unit, or if the appliance is supplied without a plug, it must be installed and connected by a suitably qualified and competent person in strict accordance with current local and national safety regulations. The manufacturer cannot be held liable for damage caused by incorrect installation or connection.

► If the connection cable is damaged, it must be replaced by a suitably qualified electrician with a special connection cable of type H 05 V V-F (pvc insulated), available from Miele.

► Never open the housing of the appliance. Tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults.

Warning and Safety instructions

► While the appliance is under guarantee, repairs should only be undertaken by a service technician authorised by the manufacturer. Otherwise the guarantee will be invalidated.

► During installation, maintenance and repair work, the appliance must be disconnected from the mains electricity supply. It is only completely isolated from the electricity supply when:

- the mains fuse is disconnected,
- the screw-out fuse is removed (in countries where this is applicable),
- it is switched off at the wall socket and the plug is withdrawn from the socket, or
- it is switched off at the fused spur connection unit.

► Faulty components must only be replaced by genuine Miele original spare parts. The manufacturer can only guarantee the safety of the appliance when Miele replacement parts are used.

► In countries where there are areas which may be subject to infestation by cockroaches or other vermin, pay particular attention to keeping the appliance and its surroundings in a clean condition at all times. Any damage which may be caused by cockroaches or other vermin will not be covered by the guarantee.

Correct use

► The appliance gets hot when in use and remains hot for quite a while after being switched off. Do not touch it whilst it could still be hot.

Caution: Danger of burning.

► For added protection, it is advisable to use heat-resistant pot holders or gloves when using the appliance. Do not let them get damp or wet, as this causes heat to transfer through the material more quickly with the risk of scalding or burning yourself.

► Do not heat up unopened tins of food on the grill as pressure will build up in the tin, causing it to explode. This could result in injury and scalding or damage.

► Do not use the appliance to heat up the room, and never switch it on with the heating element in the raised position. Due to the high temperatures radiated, objects near the appliance could catch fire. The life of the appliance could also be reduced.

► This appliance must not be set up or operated in the open air.

► Do not use the appliance as a resting place for anything else. The article could melt or catch fire if residual heat is still present or if the appliance is switched on by mistake.

► Do not cover the appliance, e.g. with a cloth, kitchen foil, etc. This could be a fire hazard if the appliance is switched on by mistake.

Warning and Safety instructions

► Never leave the appliance unattended when it is switched on. Overheated oil or residues of food or fat on the lava rocks could flare up and even set the cooker hood alight. Fire hazard.

► If, despite this, oil or fat does catch fire, do not attempt to put out the flames with water. Use a suitable fire blanket, saucepan lid, damp towel or similar to smother the flames.

► When grilling or keeping food warm, do not use grill pans, griddles, saucepans or similar on the open grill, and never cover the rack (e.g. with aluminium foil) or use disposable aluminium foil containers. The resulting build-up of heat could damage the rack.

► Clean the lava rocks regularly and replace them when necessary. Rocks which are saturated catch fire easily. The grill trough and the lava rock container should be cleaned after each use to keep them free of oil and fat.

► Always ensure that food is sufficiently cooked or reheated. Many factors will affect the overall cooking time, including the size and quantity of the food and its temperature. Some foods may contain micro-organisms which are only destroyed by thorough cooking at a sufficiently high temperature for long enough. Therefore, when cooking or reheating food such as poultry, it is particularly important that the food is completely cooked through. If in doubt, select a longer cooking or reheating time.

► The grill trough must always be filled with water whenever the grill is in use.

► When using an electric socket near the appliance, care should be taken that the cable of the electrical appliance does not come into contact with the hot appliance. The insulation on the cable could become damaged, giving rise to an electric shock hazard.

► If the appliance is installed in a room without air conditioning in areas with high levels of humidity, there is a risk of moisture settling on the heater elements if it is not used for longer periods of time.

When next used this could cause the fuse to trip. To prevent this risk it is advisable to switch the appliance on every 6 months for 15 minutes using the highest power setting.

Make sure there are no flammable objects near the appliance during this process and do not leave the appliance unattended.

The manufacturer cannot be held liable for damage caused by non-compliance with these Warning and Safety instructions.

Caring for the environment

Disposal of the packing material


The transport and protective packing has been selected from materials which are environmentally friendly for disposal, and can normally be recycled.

Ensure that any plastic wrappings, bags, etc. are disposed of safely and kept out of the reach of babies and young children. Danger of suffocation.

Rather than just throwing these materials away, please ensure they are offered for recycling.

Disposal of your old appliance

Electrical and electronic appliances often contain materials which, if handled or disposed of incorrectly could be potentially hazardous to human health and to the environment. They are, however, essential for the correct functioning of your appliance. Please do not therefore dispose of it with your household waste.



Please dispose of it at your local community waste collection/recycling centre or contact your dealer for advice. Ensure that it presents no danger to children while being stored for disposal.

It should be unplugged or disconnected from the mains electricity supply by a competent person.

Before using for the first time

Please stick the extra data plate for the appliance supplied with this documentation in the space provided in the "After sales service" section of this booklet.

Cleaning for the first time

- Remove any protective foil and adhesive labels.
- Wash the grill trough and the rack in hot water with a little washing-up liquid, and dry thoroughly (see "Cleaning and care").
- Clean the other surfaces with a damp cloth, and then wipe dry.

Metal components have a protective coating which may give off a slight smell when heated up for the first time. The smell and any vapours will dissipate after a short time, and do not indicate a faulty connection or appliance.

Operation

Grill chart

The times given in the table serve as a guide, based on a pre-heated grill at settings 9 to 12. The grilling time required will depend on the type of food, its texture and thickness as well as personal taste.

Food	Time in minutes
Meat and sausages	
Sausages	6 - 8
Fillet steak	4 - 10
Burgers	12 - 16
Chicken drumsticks	16 - 18
Lamb chops	4 - 8
Liver	3 - 6
Turkey escalopes	8 - 10
Kebabs	14 - 18
Cutlets/schnitzel	8 - 12
Spare ribs	15 - 20
T-bone steak	10 - 20
Fish and seafood	
Trout	12 - 16
Prawns	2 - 4
Salmon steak	10 - 12
Mackerel	10 - 12
Tuna fish steak	6 - 8


Food	Time in minutes
Vegetables	
Aubergines	6 - 8
Jacket potatoes, pre-cooked	10 - 20
Vegetarian kebabs	5 - 6
Corn on the cob, pre-cooked	5 - 8
Peppers, cut into strips	2 - 3
Tomato halves	2 - 4
Fruit	
Pineapple slices	2 - 3
Apple slices	2 - 3
Miscellaneous	
Toast	2 - 3
Tofu	4 - 6

Operation

To prepare the grill

The grill can be used with or without the lava rocks. Without the lava rocks the rising steam keeps the food being grilled moist. Grilling with the lava rocks creates a particularly intensive aroma.

- Check that the drain tap is closed.
- Remove the rack (or racks, depending on model), lift up the heating elements, and if not being used, take the lava rock container out.

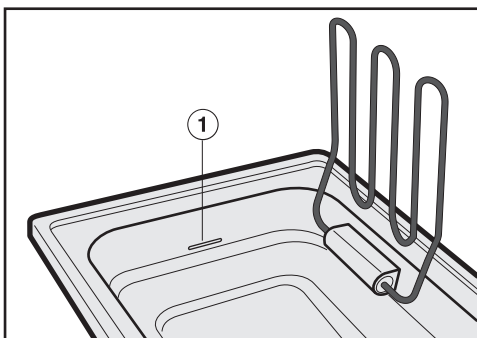


- Fill the grill trough
 - when grilling **without lava rocks** up to marker line ① with approx. 2.5 litres of water (CS 1312) approx. 4.0 litres of water (CS 1322).
 - when grilling **with lava rocks** with approx. 1.2 litres of water (CS 1312) approx. 1.8 litres of water (CS 1322).
- If using lava rocks, put the container back in the grill trough.
- Lower the heating elements again, and put the rack back on it.

Switching on and off

The grill has 2 heating elements which can be switched on and regulated independently. Both elements can be used together when grilling large quantities of food. For smaller quantities, the front element can be used to grill the food whilst the rear element can be used to keep food warm at settings 3 or 4.

To switch the heating elements on or off, the appropriate control is turned in a clockwise or anti-clockwise direction.

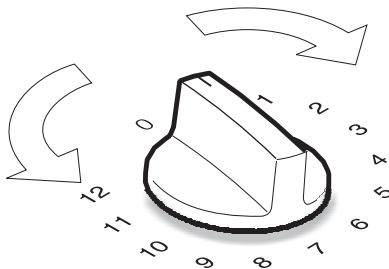

- lights up in the display after the appliance has been switched on, and goes out again once the grill has been switched off.

Grilling

When grilling, keep an eye on the level of water in the trough. If necessary, add more water.

When grilling or keeping food warm, do not use grill pans, griddles, saucepans or similar on the open grill, and never cover the rack(s) (e.g. with aluminium foil). The resulting build-up of heat could damage the rack(s).

- Turn one or both controls to setting "12".
- Pre-heat the grill with the rack(s) in place for approx. 10 minutes.

Make sure the control(s) are set precisely to setting 12.
If the controls are not set to the exact position, the heating will not work with maximum power.

- Select the setting you require.
- Turn the food once or more during grilling.

Useful tips

- Pat dry wet food with kitchen paper to absorb surplus moisture and avoid spitting.
- To prevent meat drying out, do not season with salt until after it has been cooked.
- Marinating often improves the flavour of food to be grilled.
- Brush food that has not been marinated with a little oil. Only use oils that can be heated to a high temperature.
- The grilling time for jacket potatoes and corn on the cob can be reduced by pre-cooking potatoes for 15-40 minutes (depending on the size) and corn on the cob for 10-15 minutes.

After grilling

- Switch off the appliance.
- Clean the grill after each use while it is still warm to the touch (see "Cleaning and care").
- After grilling check the appearance of the lava rocks. If they look dark, they are saturated with oil and must be cleaned or replaced.

Safety features

Overheating protection


A safety cut-out automatically switches the appliance off if the water level drops too low.

- Add some cold water.

As soon as the appliance has cooled down, the heating elements switch back on again and you can continue grilling.

Safety switch-out

A safety cut-out ensures that the grill elements only heat up when they are lying horizontally and not when they are raised up.

 Do not use a steam cleaning appliance to clean this appliance. The steam could reach the electrical components and cause a short circuit.

Clean the appliance regularly, preferably after each use. Allow the appliance to cool down to a safe temperature before cleaning. To avoid water marks and limescale deposits, use a soft cloth to dry surfaces that have been cleaned with water.

Abrasive cleaning agents and scouring sponges may only be used to clean the heating elements.

To avoid damaging the stainless steel surfaces of your appliance, do not use:

- cleaning agents containing soda, alkalines, ammonia, acids or chlorides,
- cleaning agents containing descaling agents,
- stain or rust removers,
- abrasive cleaning agents, e.g. powder cleaners and cream cleaners,
- solvent-based cleaning agents,
- dishwasher cleaner,
- grill and oven cleaners,
- glass cleaning agents,
- hard, abrasive brushes or sponges, e.g. pot scourers, brushes or sponges which have been previously used with abrasive cleaning agents,
- sharp pointed objects (these can damage the seal between the frame and the worktop).

Cleaning and care

Stainless steel

The ceramic and stainless steel hob cleaner is suitable for cleaning stainless steel surfaces (see "Optional accessories").

To help prevent resoiling, we recommend a stainless steel conditioner (see "Optional accessories").

Apply sparingly with a soft cloth.

Do not use a stainless steel cleaning agent on **printed** surfaces. This would rub off the print. These areas should be only cleaned with an E-Cloth or with a solution of warm water and a little washing-up liquid applied with a soft sponge.

Rack and lava rock container

Wash the rack and lava rock container after every use in hot water with a little washing-up liquid. If the rack is heavily soiled it should be soaked first and then any soiling can be removed using a soft brush.

If the lava rock container is heavily soiled a non-abrasive stainless steel spiral pad can be used together with a little stainless steel cleaning agent. Leave to dry thoroughly after cleaning them.

Do not use conditioning agents for stainless steel in the lava rock container.

Heating elements

Use a scouring sponge to clean any residues left on the heating elements.

Lava rocks

Clean the lava rocks regularly.

Soak them in a suitable container in hot water with a little washing-up liquid, then swirl them around in the water several times. Pour away the dirty water, and rinse 2 or 3 times in clean water. Lay the rocks out to dry on a suitable towel.

Washing lava rocks removes the outer used layer. The speed with which the lava rocks wear down will depend on how often they are used and for how long.

If the lava rocks in the container are reduced by half, they should be replenished.


Grill trough

Clean the grill trough after each use.

- After grilling, allow the water in the trough to cool down before draining it.
- Place a container large enough to take the contents of the trough under the drain.

Ensure that the underside of the appliance is always easily accessible for draining water.

Always wait until the water has cooled down before draining to avoid the danger of being scalded.

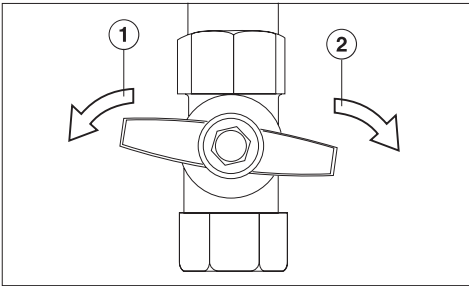

- Open the drain tap under the grill by turning it **anti-clockwise** ①.
- Once the water has all drained, turn off the tap by turning it **clockwise** ② as far as it will go.
- Wash the grill trough after every use with hot water and a little washing-up liquid. If it is heavily soiled a non-abrasive stainless steel spiral pad can be used together with a little stainless steel cleaning agent.
- Drain the suds solution into a suitable container and then clean the drain outlet with a bottle brush. Rinse with hot water, and then wipe the grill trough and the drain dry.

Never use a conditioning agent for stainless steel on the grill trough.

Problem solving guide

Installation work and repairs to electrical appliances must only be carried out by a suitably qualified and competent person in strict accordance with current local and national safety regulations (BS 7671 in the UK). Repairs and other work by unqualified persons could be dangerous. The manufacturer cannot be held liable for unauthorised work.

What to do if...

... after switching on, the appliance does not heat up.

Check whether

- the overheating protection mechanism has been activated. Proceed as described in "Overheating protection".
- the mains fuse has tripped. If it has, contact a qualified electrician or the Miele Service Department.


... the food does not begin to brown when the appliance has been pre-heated at setting "12" for 10 minutes.

Check that the control marker is exactly at setting "12". If it is between settings "12" and "0", the grill heats at a lower power setting.

Miele offers a range of useful accessories designed for your appliance.


These can be ordered via the internet at www.miele-shop.com, or from Miele (see back cover for contact details) or from your Miele dealer.

Griddle CSGP 1300




Cast-iron griddle to place on top of the CS 1312 grill, with a flat and a fluted side

Griddle CSGP 1400




Cast-iron griddle to place on top of the CS 1322 grill, with a flat and a fluted side


Wire frame for griddle CSPG 1300



Wire frame for griddle CSPG 1400



Handle



Optional accessories

Cleaning and care products

Ceramic and stainless steel hob cleaner 250 ml




Removes heavy soiling, limescale deposits and light discolouration

Stainless steel conditioning agent 250 ml



Removes water marks, flecks and finger prints.
Helps keep the appliance looking good for longer.

E-Cloth (microfibre cloth)



Removes finger marks and light soiling.

Safety instructions for installation

Fit the wall units and extractor hood before fitting the barbecue grill to avoid damaging the surface.

► The veneer or laminate coatings of worktops (or adjacent kitchen units) must be treated with 100 °C heat-resistant adhesive which will not dissolve or distort.

Any backmoulds must be of heat-resistant material.

► This equipment may only be used in mobile installations such as ships, caravans, aircraft etc. if a risk assessment has been carried out by a suitably qualified engineer.

► The barbecue grill must not be installed directly next to a salamander (CS 1421). It is essential to maintain a distance of at least 150 mm between these two appliances.

► After installing the grill, ensure that the connection cable is without hindrance and that there is no mechanical obstruction which could damage it, e.g. when draining the appliance.

► Ensure that the electrical cable is installed in such a way that it does not touch any parts of the appliance which become hot. The cable will be damaged by extreme heat.


► Observe carefully the safety distances given on the following pages.

► Do not use any sealant except where expressly instructed to do so. The seal underneath the appliance provides a sufficient seal for the worktop.

All dimensions in this instruction booklet are given in mm.

Safety instructions for installation

Safety distance above the grill



When two or more appliances are installed together below a cooker hood, e.g. a grill and an induction hob combiset, which have different safety distances given in the installation instructions, you should select the greater distance of the two.

A minimum safety distance must be maintained between the hob and the cooker hood above it. See the cooker hood manufacturer's operating and installation instructions for details.

If the manufacturer's instructions are not available for the cooker hood, then a minimum safety distance of at least 760 mm must be maintained. For any flammable objects, e.g. utensil rails, wall units etc, a minimum distance of at least 760 mm must be maintained between them and the appliance below.

Safety instructions for installation

Safety distances to the sides of the grill

Ideally the grill should be installed with plenty of space on either side. There may be a wall at the rear and a tall unit or wall at one side. On the other side, however, no unit or divider should stand higher than the built-in appliance (see illustrations).

Due to the high temperatures radiated by the grill, it is essential that a minimum distance of **50 mm** is maintained between the worktop cut-out and the back wall.

The minimum distance ① between the worktop cut-out and a wall or tall unit to the right or left of it is:

40 mm for CS 1212
CS 1221
CS 1234
CS 1223



50 mm for CS 1112
CS 1122
CS 1134
CS 1326
CS 1411

100 mm for CS 1012
CS 1013


150 mm for CS 1421
CS 1312
CS 1322

200 mm for CS 1034


250 mm for CS 1011
CS 1018
CS 1021



Recommended



Not recommended




Not allowed

Safety instructions for installation

Safety distance when installing the appliance near a wall with additional niche cladding

A minimum safety distance must be maintained between the worktop cut-out and any niche cladding to protect it from heat damage.

If the niche cladding is made from a **combustible material** (e. g. wood) a minimum safety distance ⑤ of 50 mm must be maintained between the cut-out and the cladding.

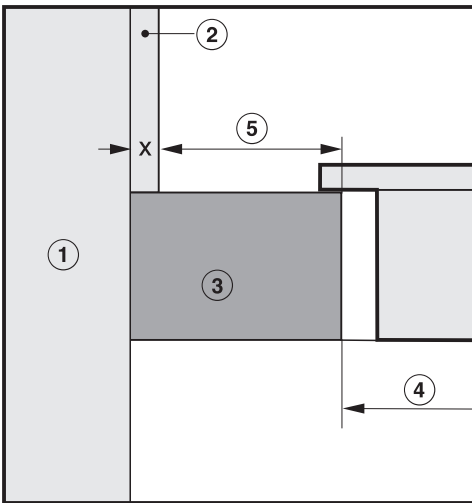


If the niche cladding is made from a **non-combustible material** (e. g. metal, natural stone, ceramic tiles) a minimum safety distance ⑤ of 50 mm less the thickness of the cladding must be maintained between the cut-out and the cladding.

Example: 15 mm niche cladding


50 mm - 15 mm = minimum safety distance of 35 mm

- ① Masonry
- ② Niche cladding
Dimension x = thickness of niche cladding material
- ③ Worktop
- ④ Worktop cut-out
- ⑤ Minimum safety distance
for **combustible** materials is 50 mm
for **non-combustible** materials is 50 mm less dimension x

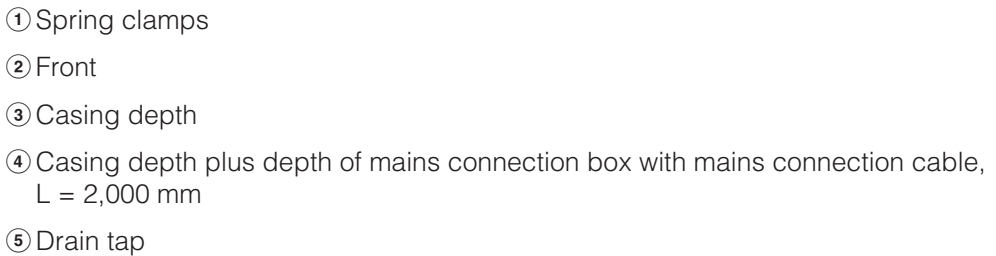

Appliance and building-in dimensions

CS 1322

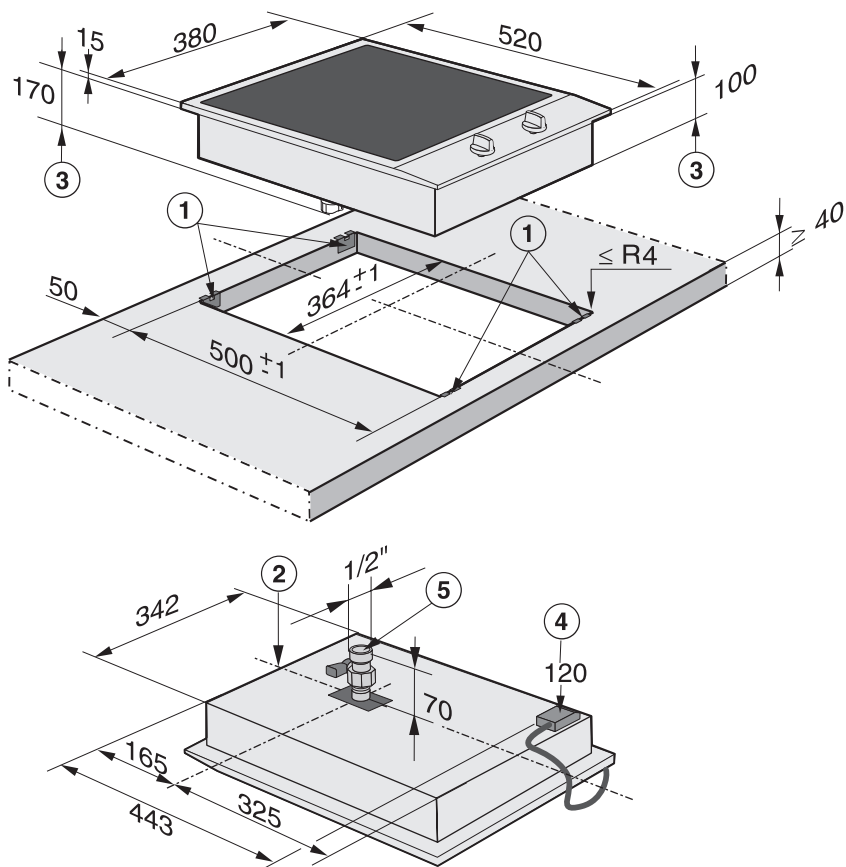

- ① Spring clamps
- ② Front
- ③ Casing depth
- ④ Casing depth plus depth of mains connection box with mains connection cable, L = 2,000 mm
- ⑤ Drain tap


- Make the worktop cut-out for one or more appliances as applicable.
Remember to maintain a **minimum safety distance** from the **back wall**, as well as from any **tall unit or side wall** to the right or left of the appliance(s).
See "Safety instructions for installation".
- Seal the cut surfaces with a suitable heat-resistant sealant to avoid swelling caused by moisture.

If, during installation, you find that the seals on the corners of the frame are not flush with the worktop surface, the corner radius ($\leq R4$) can be carefully scribed to fit.


Installation of several appliances

When installing two or more appliances next to each other a spacer bar ② must be used between each one.
See "Fixing the spring clamps and spacer bars".

Worktop cut-out - two appliances

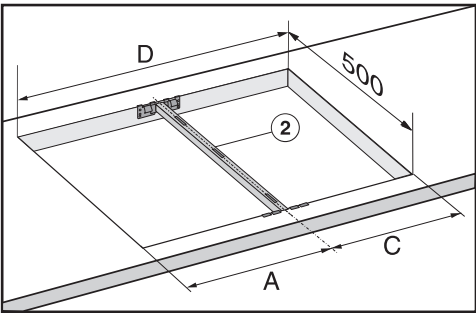

Worktop cut-out - three appliances

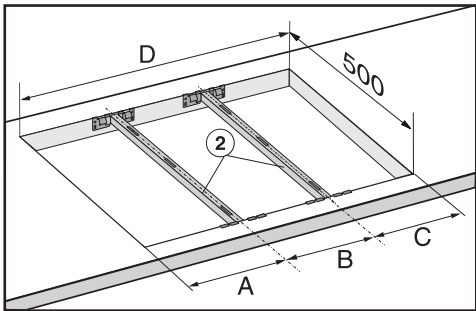


To calculate the cut-out width (D) required:

Add up the widths of each appliance (e.g. width A + B + C etc.) and subtract 16 mm from this figure
(i.e. 8 mm is taken off either end of the appliance run).

Number of appliances	Appliance width in mm	Worktop cut-out in mm
1	288	$288 - 16 = \mathbf{272}$
2	288, 288	$288 + 288 - 16 = \mathbf{560}$
2	288, 380	$288 + 380 - 16 = \mathbf{652}$
3	288, 288, 288	$288 + 288 + 288 - 16 = \mathbf{848}$
3	288, 288, 380	$288 + 288 + 380 - 16 = \mathbf{940}$

Installation of several appliances

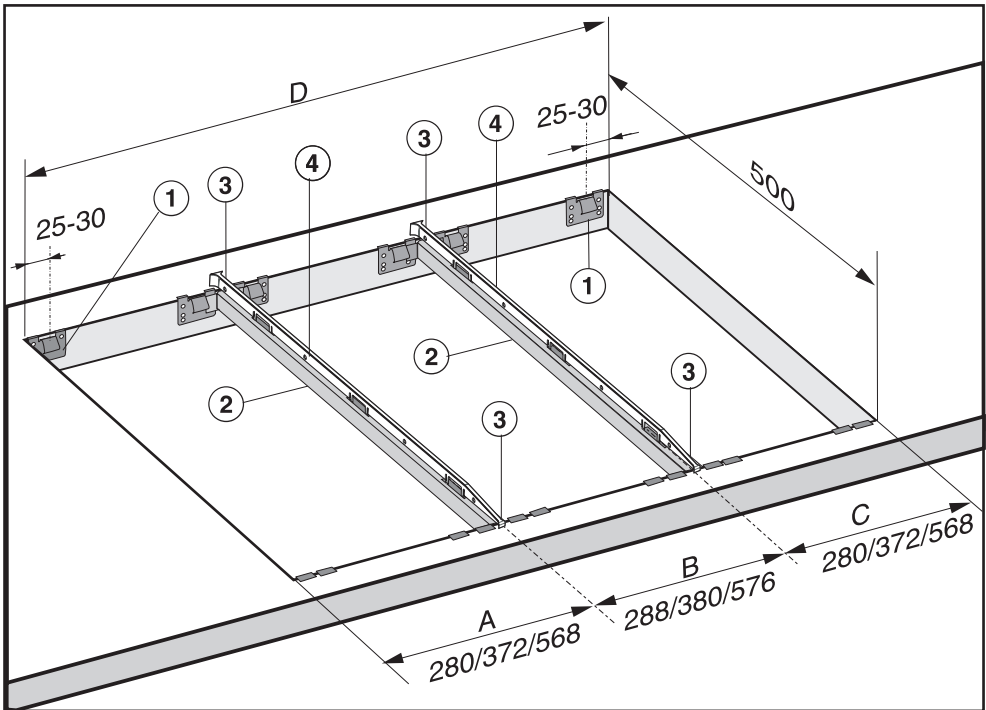



- ① Spring clamps
- ② Spacer bars
- ③ Gap between spacer bar and worktop
- ④ Sealing strip

The illustration shows a worktop cut-out with spring clamps ① and spacer bars ② for 3 appliances.

An additional spacer bar is required for each additional appliance. The position for securing each additional spacer bar will depend on the width of appliance **B** (288 mm / 380 mm / 576 mm).

Fixing the spring clamps and spacer bars

Wooden worktops

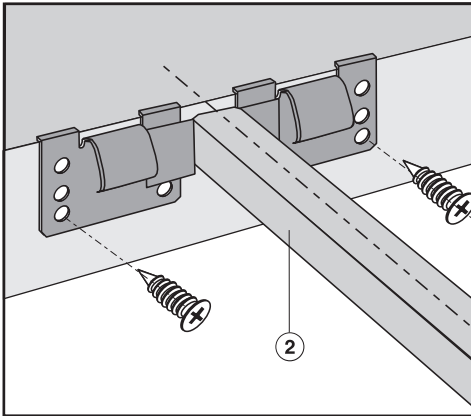
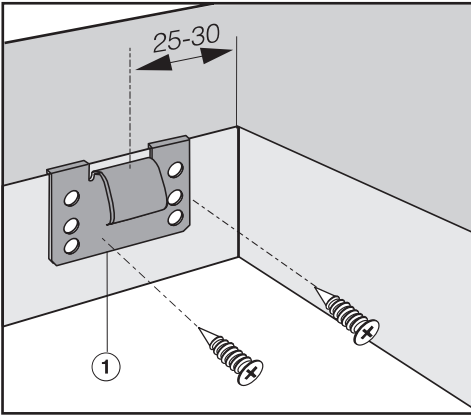


- Position the spring clamps supplied ① and spacer bars ② on the top edge of the cut-out in the positions marked.
- Secure the spring clamps and spacer bars with the 3.5 x 25 mm screws supplied.



Fixing the spring clamps and spacer bars

Granite and marble worktops

The screws are not required for granite or marble worktops.

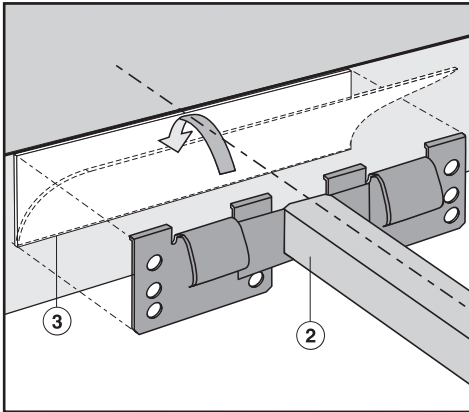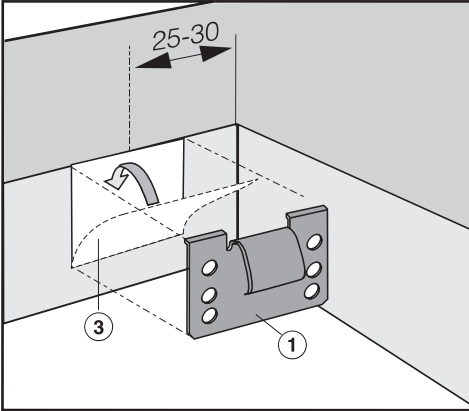

- Position and secure the spring clamps ① and spacer bars ② using strong, double-sided adhesive tape ③.

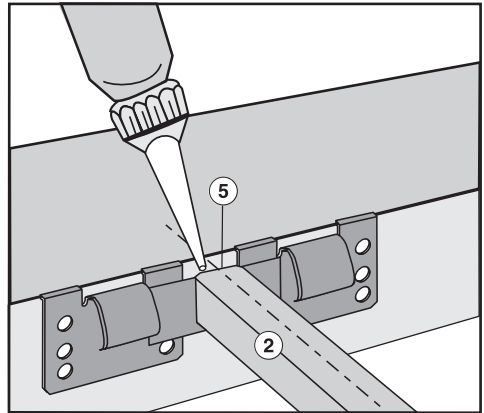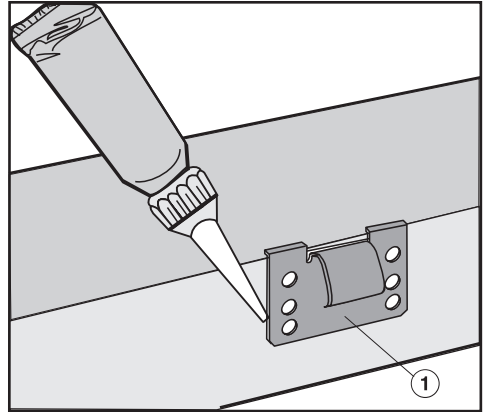

- Apply silicone to the side edges and the lower edges of the spring clamps ① and spacer bars ②.
- Then fill gap ⑤ between the spacer bars and the worktop with silicone from the tube supplied.


Installing the appliance(s)

- Feed the connection cable down through the cut-out.
- Starting at the front, position the appliance in the worktop cut-out.
- Using both hands, press down evenly on the sides of the appliance until it clicks into position. When doing this make sure that the seal under the appliance sits flush with the worktop on all sides. This is important to ensure an effective seal all round. **Do not use sealant.**
- Starting at the front, position the next appliance in the worktop cut-out.
- Connect each appliance to the mains (see "Electrical connection").
- Check that each appliance works correctly.


Once installed, the hob can be removed using a special tool. It can also be pushed up out of the cut-out from below. It must be pushed up from the back first.

When installing several appliances, a sealing strip must be fitted into each spacer bar.

- Push the appliance to the side until the long slots in the spacer bar can be seen.

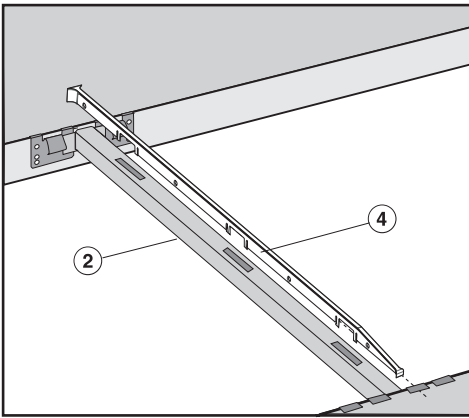


- Fit the sealing strip ④ into the long slots in the spacer bar ②.

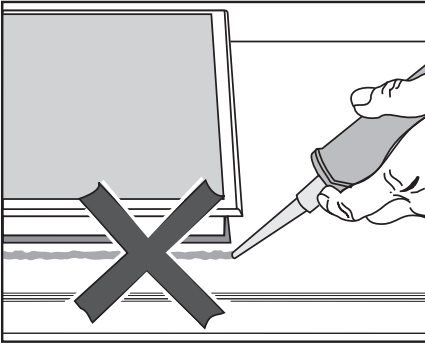

Do not use any sealant unless expressly instructed to do so. The sealing strip under the edge of the top part of the appliance provides a sufficient seal for the worktop.

Do not use sealant between the frame of the top part of the appliance and the worktop. This could cause difficulties if the appliance ever needs to be taken out for servicing and possibly result in damage to the frame or the worktop.

Tiled worktop

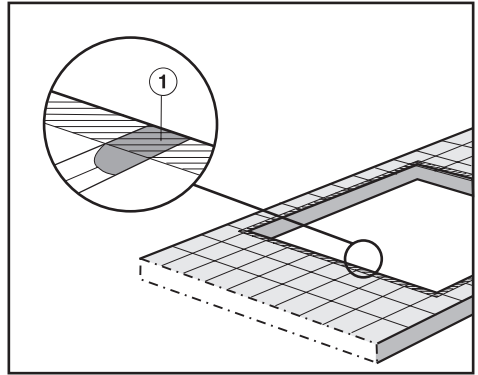

Grout lines ① and the hatched area underneath the appliance must be smooth and even. If they are not, the appliance frame will not sit flush with the worktop and the sealing strip will not provide a good seal between the appliance and the worktop.

Electrical connection

All electrical work should be carried out by a suitably qualified and competent person in strict accordance with current local and national safety regulations (BS 7671 in the UK).

If the connection cable is damaged, it must be replaced by a suitably qualified electrician with a special connection cable of type H 05 V V-F (pvc insulated), available from Miele.

Installation, repairs and other work by unqualified persons could be dangerous. The manufacturer cannot be held liable for unauthorised work.

Ensure power is not supplied to the appliance until after installation or repair work has been carried out.

The appliance must only be operated when built-in. This is to ensure that all electrical parts are shielded. Live parts must not be exposed.

Do not connect the appliance to the mains electricity supply by an extension lead. These do not guarantee the required safety of the appliance.

Connection should be made via a fused plug and switched socket or a double pole fused spur connection unit, or a suitable isolator (as appropriate) which complies with national and local safety regulations and the on/off switch should be easily accessible after the appliance has been built in.

If the switch is not accessible after installation (depending on country) an additional means of disconnection must be provided for all poles.

For extra safety it is advisable to install a suitable residual current device (RCD).

When switched off there must be an all-pole contact gap of at least 3 mm in the isolator switch (including switch, fuses and relays).

Important U.K.

The appliance is supplied for connection to a 230-240 V, 50 Hz supply with a 3-core cable.

The wires in the mains lead are coloured in accordance with the following code:

- | | |
|--------------|-----------|
| Green/yellow | = earth |
| Blue | = neutral |
| Brown | = live |

WARNING THIS APPLIANCE MUST BE EARTHED

Please make sure that the connection data quoted on the data plate match the household mains supply.

Important

The electrical safety of this appliance can only be guaranteed when continuity is complete between the appliance and an effective earthing system, which complies with local and national regulations. It is most important that this basic safety requirement is present and tested regularly and if there is any doubt the electrical wiring in the home should be inspected by a qualified electrician. The manufacturer cannot be held liable for the consequences of an inadequate earthing system such as an electric shock.

The manufacturer cannot be held liable for damage which is the direct or indirect result of incorrect installation or connection.

After sales service, data plate

In the event of any faults which you cannot remedy yourself, or if the appliance is under guarantee, please contact:


- Your Miele dealer, or
- the Miele Customer Contact Centre (see back cover for address).

Please note that telephone calls may be monitored and recorded to improve our service.

When contacting Miele, please quote the model and serial number of your appliance which are given on the data plate.

N.B. A call-out charge will be applied for service visits where the problem could have been resolved as described in these instructions.

Space in which to stick the extra data plate supplied with the appliance. Ensure that the model number is the same as the one on the front of these instructions.



United Kingdom

Miele Co. Ltd.

Fairacres, Marcham Road
Abingdon, Oxon, OX14 1TW

Tel: 0845 365 0555

Fax: 0845 365 0777

Customer Contact Centre Tel: 0845 365 6600

E-mail: info@miele.co.uk

Internet: www.miele.co.uk

Australia

Miele Australia Pty. Ltd.

ABN 96 005 635 398

1 Gilbert Park Drive, Knoxfield, VIC 3180

Tel: (03) 9764 7130, Fax: (03) 9764 7149

Internet: www.miele.com.au

China

Miele Shanghai

Suite 4105-06, Plaza 66

1266 Nanjing Road West

Jing An District

Shanghai 200040, PRC

Tel: +86 21 6288 4200, Fax: +86 21 6288 4100

E-mail: mieleshanghai@cn.miele.com

Internet: www.miele.cn

Hong Kong

Miele (Hong Kong) Limited

AIA Plaza, 24th Floor

18 Hysan Avenue

Causeway Bay

Tel: +852- 2610-1331, Fax: +852-2610-1013

E-mail: mielehk@miele.com.hk

Internet: www.miele.hk

India

Miele Appliances India Pvt. Ltd.

Ground Floor, Copia Corporate Suites

Plot No. 9, Jasola

New Delhi – 110025

Tel: 011-46 900 000, Fax: 011-46 900 001

E-mail: customercare@miele.in

Internet: www.miele.in



Ireland

Miele Ireland Ltd.

Broomhill Road, Tallaght, Dublin 24

Tel: (01) 461 0710, Fax: (01) 461 07 97

E-Mail: info@miele.ie

Internet: www.miele.ie

New Zealand

Miele New Zealand Limited

Unit L, 10-20 Sylvia Park Road

Mt. Wellington, 1060, Auckland, NZ

Internet: www.miele.co.nz

Singapore

Miele Southeast Asia

Miele Pte. Ltd.

163 Penang Road

04 - 02/03 Winsland House II

Singapore 238463

Tel: +65 6735 1191, Fax: +65 6735 1161

E-Mail: infosea@miele.com.sg

Internet: www.miele.sg

South Africa

Miele (Pty) Ltd

63 Peter Place, Bryanston 2194

P.O. Box 69434, Bryanston 2021

Tel: +27 (0) 11 548-1900

Fax: +27 (0) 11 548-1935

E-mail: info@miele.co.za

Internet: www.miele.co.za

United Arab Emirates

Miele Appliances Ltd.

P.O. Box 11 47 82

Gold & Diamond Park

Sheikh Zayed Road

Building 6 / Offices Nos. 6-214 to 6-220

Dubai

Tel: +971-4-341 84 44

Fax: +971-4-341 88 52

E-Mail: info@miele.ae

Internet: www.miele.ae